


Krimphouder DIN 69893- HSK 63-A precisie gebalanceerd G 2,5 / 25000 omw./min.

Bestel Nr.	d 1	X 1	X 2	d 2	d 3
A63.70.03.G2,5	3	80	15	15	20
A63.70.04.G2,5	4	80	20	15	20
A63.70.05.G2,5	5	80	25	15	20
A63.70.06.G2,5	6	80	36	21	27
A63.70.06.1.G2,5	6	120	36	21	27
A63.70.06.2.G2,5	6	160	36	21	27
A63.70.06.3.G2,5	6	200	36	21	27
A63.70.08.G2,5	8	80	36	21	27
A63.70.08.1.G2,5	8	120	36	21	27
A63.70.08.2.G2,5	8	160	36	21	27
A63.70.08.3.G2,5	8	200	36	21	27
A63.70.10.G2,5	10	85	42	24	32
A63.70.10.1.G2,5	10	120	42	24	32
A63.70.10.2.G2,5	10	160	42	24	32
A63.70.10.3.G2,5	10	200	42	24	32
A63.70.12.G2,5	12	90	47	24	32
A63.70.12.1.G2,5	12	120	47	24	32
A63.70.12.2.G2,5	12	160	47	24	32
A63.70.12.3.G2,5	12	200	47	24	32
A63.70.14.G2,5	14	90	47	27	34
A63.70.14.1.G2,5	14	120	47	27	34
A63.70.14.2.G2,5	14	160	47	27	34
A63.70.14.3.G2,5	14	200	47	27	34
A63.70.16.G2,5	16	95	50	27	34
A63.70.16.1.G2,5	16	120	50	27	34
A63.70.16.2.G2,5	16	160	50	27	34
A63.70.16.3.G2,5	16	200	50	27	34
A63.70.18.G2,5	18	95	50	33	42
A63.70.18.1.G2,5	18	120	50	33	42
A63.70.18.2.G2,5	18	160	50	33	42
A63.70.18.3.G2,5	18	200	50	33	42
A63.70.20.G2,5	20	100	52	33	42
A63.70.20.1.G2,5	20	130	52	33	42
A63.70.20.2.G2,5	20	160	52	33	42
A63.70.20.3.G2,5	20	200	52	33	42
A63.70.25.G2,5	25	115	58	44	53
A63.70.25.1.G2,5	25	160	58	44	53
A63.70.25.2.G2,5	25	200	58	44	53
A63.70.32.G2,5	32	120	58	44	53
A63.70.32.1G2,5	32	160	58	44	53
A63.70.32.2.G2,5	32	200	58	44	53

Krimphouder HSK 63-A
voor het spannen van HM en HSS schachten.

d1 = 3 tot d 1 = 5 , zonder stelschroef.
Coniciteit opname schacht 4,5°

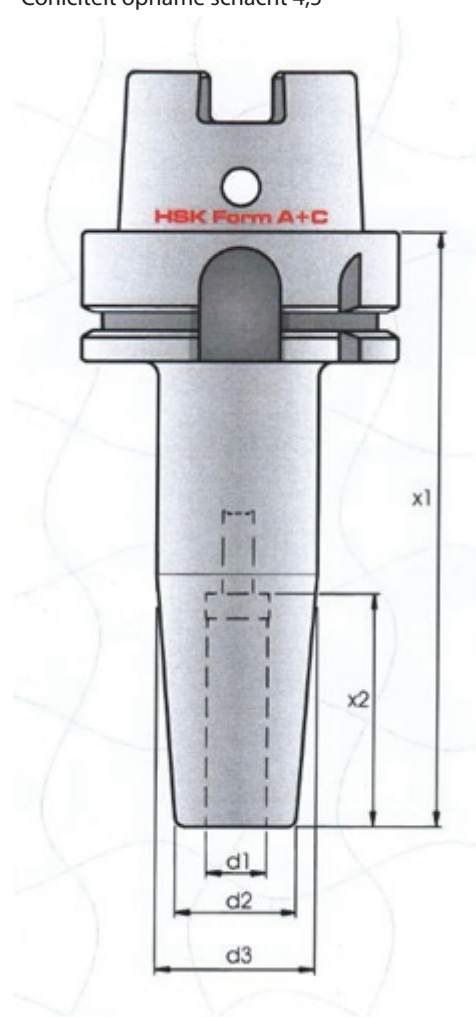

Bestel nr.	
A63.700	HSK 63 koelmiddel doorvoer set
A63.701	HSK 63 montage sleutel koelpijp



Techno Tool

Watermunt 178
NL - 5931 TL Tegelen
T +31(0) 77 3260124

info@technotool.nl
www.technotool.nl
M +31(0) 6 20024242